




DM-FLXA

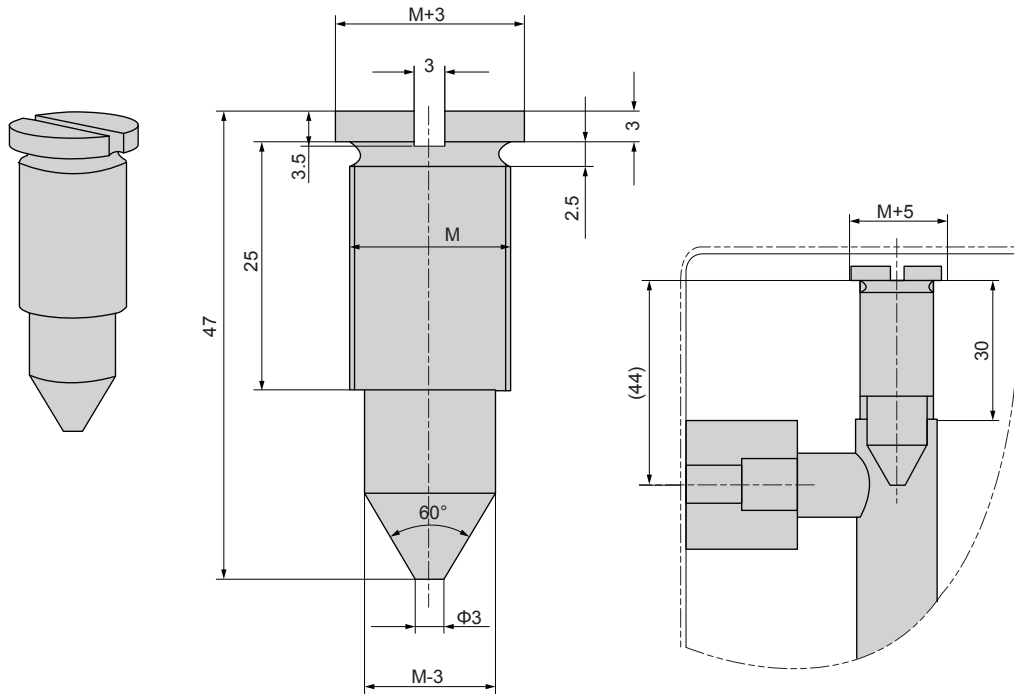

Material: C45
Wärmebehandlung: HRC28-32

Material: C45
Heat treatment: HRC28-32

Bestell-Nr. Catalog No.	Lochgröße Punching size
M16	<10
M20	10~14
M24	14~18

Bestellnummer / Order Number

	Bestellnr. / Catalog No.	-	M
	DM-FLXA	-	16








DM-GBAA

Material X6CrNiTi18-10
Befestigung mit Schrauben M6x16
GB68

Material: X6CrNiTi18-10
Mounting with bolts M6x16 GB68

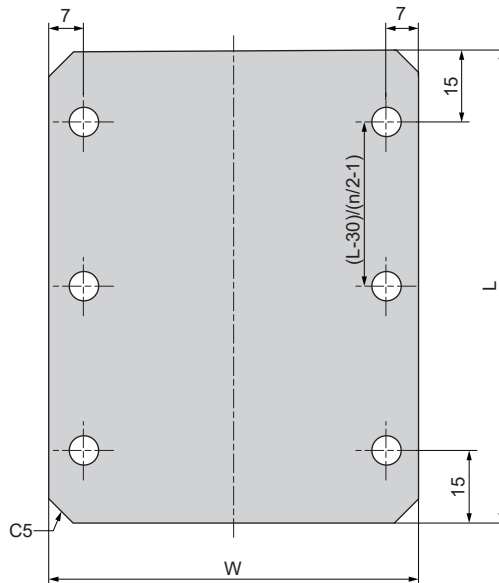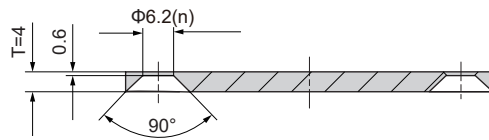

Montagebeispiel
Mounting example

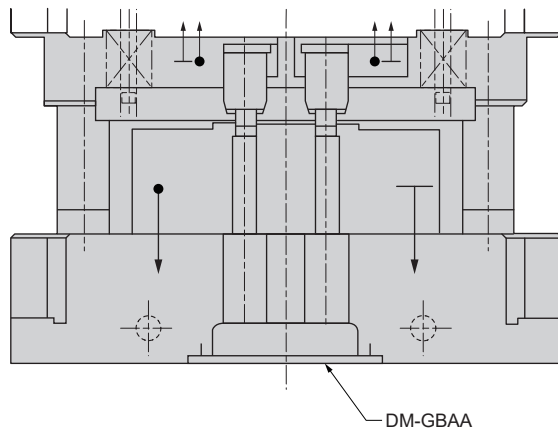

Bestellnummer / Order Number



Bestellnr. / Catalog No.

DM-GBAA

L

150

W

100

n

4

